


## StromCard

Fully coated folding box board with coated back, GC1

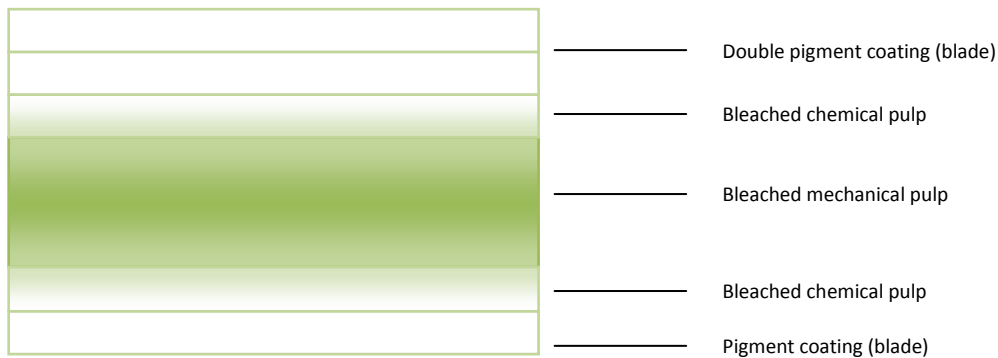

Grammage g/m <sup>2</sup>	Thickness µm	Stiffness, Taber (mN/m)	
		MD	CD
225	320	11,0	4,8
240	350	13,0	5,5
260	400	16,5	7,0
285	450	22,0	9,5
310	500	26,0	11,0
340	550	31,0	13,0
360	600	40,0	17,0
+/-4%	+/-5%	-15%	-15%

<b>Moisture</b>		8 %			+/-1%
<b>Smoothness (PPS)</b>	top side	1,3	µm	ISO 8791	max 1,6 µm
<b>Gloss (Hunter)</b>	top side	45	%	TAPPI T 480	
<b>Brightness</b>	top side	87	%	ISO 2470, C/2°	min 86 %
	reverse side	83	%	ISO 2470, C/2°	min 82 %
<b>Cobb, g/m<sup>2</sup> (60s)</b>	top side	40	g/m <sup>2</sup> (60s)	ISO 535	max 60 g/m <sup>2</sup>