


StromPack

Fully coated folding box board, GC2

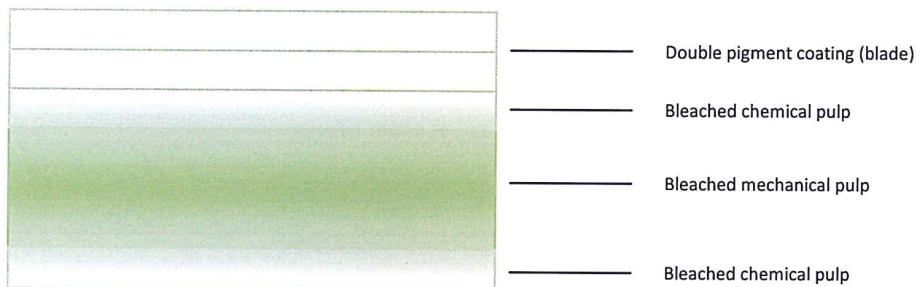

Grammage g/m ²	Thickness µm	Stiffness, Taber (mN/m)	
		MD	CD
215	320	11,0	4,8
230	350	13,0	5,5
250	400	16,5	7,0
275	450	22,0	9,5
300	500	26,0	11,0
330	550	31,0	13,0
350	600	40,0	17,0
+/-4%	+/-5%	-15%	-15%

Moisture		8 %			+/- 1%
Cobb, g/m² (60s)	top side	40	g/m ² (60s)	ISO 535	max 60 g/m ²
	reverse side	50	g/m ² (60s)	ISO 535	max 60 g/m ²
Smoothness (PPS)	top side	1,3	µm	ISO 8791	max 1,6 µm
Gloss (Hunter)	top side	45	%	TAPPI T 480	
Brightness	top side	87	%	ISO 2470, C/2°	min 86 %

Hard sized grade on request (Cobb 180s < 50 g/m²)